



GO ANYWHERE

44° 56' 17.879 N 78° 48' 21.189 W



KNOW NO BOUNDARIES

For over 50 years, ARGO has been on a quest to build the ultimate vehicle for the world's most challenging terrain conditions. Our history is filled with ground-breaking innovations in off-road mobility making ARGO the most successful amphibious Xtreme Terrain Vehicle (XTV) in the world.

Professionals that save lives, protect the environment, expand energy, or support remote infrastructure can rely on Argo XTVs to safely Go Anywhere.



SAFETY IN EVERY DIRECTION

Whether you need to traverse the most difficult terrain, cross treacherous swamps, or climb steep slopes to get the lights back on, the ARGO will get you there safely and get you home.

AVENGER PRO SERIES

Tough, affordable and easy to operate, ARGO's Avenger Pro series are designed for demanding commercial uses and have what people need to get their job done. With a choice of either the multi-purpose Avenger Pro 800 XT 8X8 or the Avenger Pro 800 XT Responder 8X8 designed for reliable off-road search and rescue, both will crawl, swim or climb anywhere you have to go.



AVENGER PRO 800
XT RESPONDER

The Avenger Pro 800 XT Responder 8X8 is designed for reliable off-road search and rescue. Equipped to save lives in remote locations, the Responder delivers hope in the face of life and death situations.

Equipped for Emergencies

An EMS stretcher mount installed onto Responder models allows crew members to rear-load stretchers.



8X8

AVENGER PRO SERIES



HD Drive Belt

HD Drive Belts stand up against hard use for traversing the most challenging terrain.



Bedliner

Protect your storage space with a heavy duty cargo bedliner.

AVENGER PRO

800 XT RESPONDER

ENGINE TYPE	30 HP Twin EFI
ENGINE COOLING	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	40 amps
TRANSMISSION (ADMIRAL)	ST
AUTO CHAIN LUBRICATION	----
HD DRIVE BELT	STD
BRUSHGUARD	STD
WINCH	3500 lbs
FRONT RACK	----
REAR BED LINER	----
HEADLIGHTS	Single Beam
TAIL LIGHTS	----
TIRES	25" AT
RIMS	Steel Bead Lock
COLORS	<div><div></div><div></div></div>

AVENGER PRO 800 XT

The Avenger 800 Pro 8x8 XT is a leading example of Go Anywhere versatility. The XT offers all the same basic features as the Responder, while leaving room for a wide range of accessory upgrades to suit your specific needs.



8X8

AVENGER PRO SERIES



The Right Tools

ARGO's 3,500 lb. (1,588 kg) winch mounts front or back to assist with self recovery.



AVENGER PRO

800 XT

ENGINE TYPE	30 HP Twin EFI
ENGINE COOLING	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	40 amps
TRANSMISSION (ADMIRAL)	ST / HT
AUTO CHAIN LUBRICATION	STD
HD DRIVE BELT	STD
BRUSHGUARD	STD
WINCH	3500 lbs
FRONT RACK	STD
REAR BED LINER	STD
HEADLIGHTS	Single Beam
TAIL LIGHTS	----
TIRES	25" AT
RIMS	Steel Offset
COLORS	<div><div></div><div></div></div>

All-Season Engines

Dependable gas engine delivers sure starts for your ARGO in any climate conditions, including high altitudes. For commercial users, ARGO offers diesel engine models to share fuel supplies with other equipment in your fleet or camp.


CONQUEST PRO SERIES

Going where no off-road vehicle has gone before, ARGO takes on formidable swamp, stiff terrain, water and snow. You can stay working efficiently and safely. No longer do you work around, over and under the landscape. You go through it. That's our job, so you can do yours.




CONQUEST PRO XT | XT-D

Providing customers in the oil and gas, mining and power industries among others with extra power, capacity, versatility and safety. The ARGO Conquest Pro series models include a number of custom improvements to get the job done.

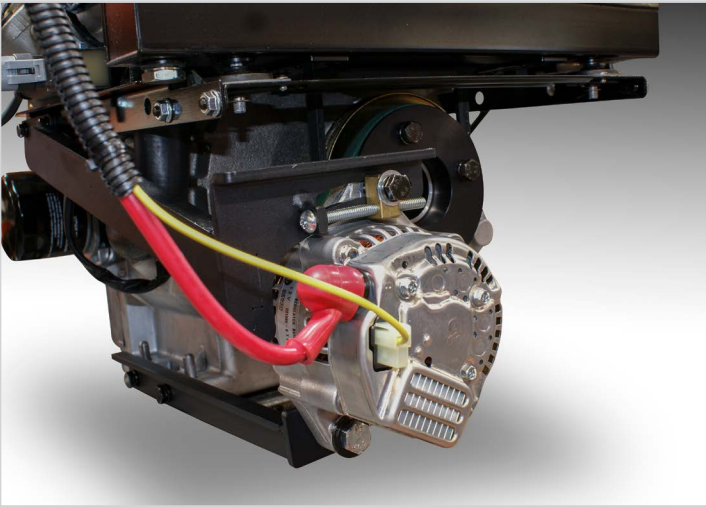

Alternator

Commercial grade alternator 60 amp standard on XT / XT-X / XT-L 65 amp standard on XT-D

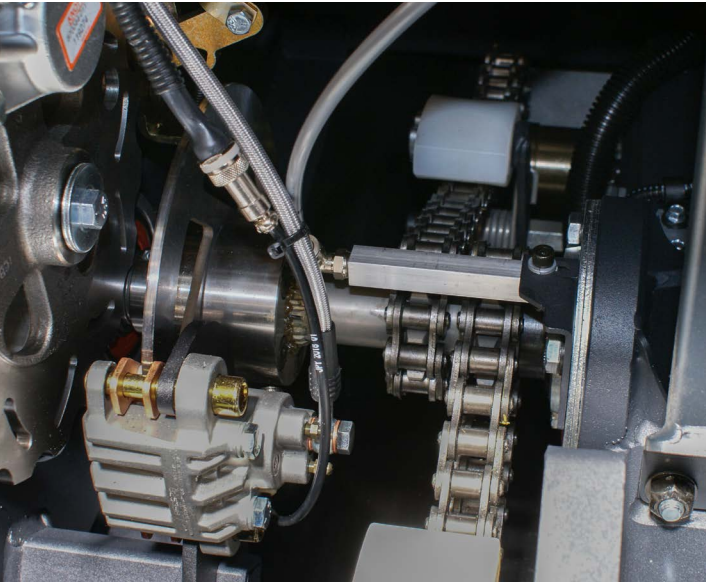

Auto Chain Lubrication

Simplifies routine maintenance to ensure smooth, dependable operation for frequent users. Standard on all XT models.

8X8



CONQUEST PRO SERIES



CONQUEST PRO

XT

XT-D

ENGINE TYPE	30 HP Twin EFI	24 HP In-line 3 Cylinder
ENGINE COOLING	Liquid Cooled	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	60 amps	65 amps
TRANSMISSION (ADMIRAL)	HT	HT
AUTO CHAIN LUBRICATION	STD	STD
HD DRIVE BELT	STD	STD
ROPS	----	----
CLEAR VIEW ROOF	----	----
WINDSHIELD WITH WIPER	----	----
POWER TILT BOX	----	----
BRUSHGUARD	STD	STD
WINCH	4500 lbs	4500 lbs
HEADLIGHTS	Single Beam	Single Beam
TAIL LIGHTS	----	----
TIRES	25" XT	25" XT
RIMS	Steel Bead Lock	Steel Bead Lock
COLORS		

CONQUEST PRO 800 XT-X | XT-L

Built for reliable and safe transport of people and equipment, the Conquest goes anywhere work needs to be done.



8X8



CONQUEST PRO SERIES



Admiral Transmission

Our multipurpose Admiral Easy Steer™ transmission provides the ideal combination of smoother steer and all-wheel constant traction.



CONQUEST PRO


XT-X

XT-L

ENGINE TYPE	30 HP Twin EFI	30 HP Twin EFI
ENGINE COOLING	Liquid Cooled	Liquid Cooled
ALTERNATOR OUTPUT (MAX)	60 amps	60 amps
TRANSMISSION (ADMIRAL)	HT	HT
AUTO CHAIN LUBRICATION	STD	STD
HD DRIVE BELT	STD	STD
ROPS	STD	STD
CLEAR VIEW ROOF	STD	STD
WINDSHIELD WITH WIPER	STD	STD
POWER TILT BOX	STD	----
BRUSHGUARD	STD	STD
WINCH	4500 lbs	4500 lbs
HEADLIGHTS	Single Beam	Single Beam LED
TAIL LIGHTS	----	----
TIRES	25" XT	25" XT
RIMS	Steel Bead Lock	Steel Bead Lock
COLORS		

Heavy Duty Axle

Heavy duty 1.5" forged axles in oil bathed reinforced housings.

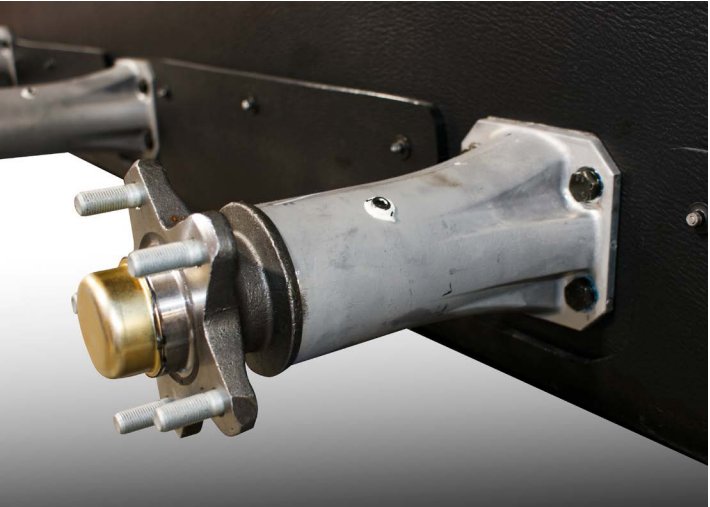

Power Dump Box

The X-TX solid steel Power Dump Box can move bulk loads up to 1,000 lbs (450 kgs).



ARGO ACCESSORIES

Canvas Enclosure

Converts the 2 person canvas sides to a 4 person canvas enclosure. Requires 956-15 & 956-16 ROPS, 958-90 Windshield, 958-102 & 958-104 Hard Top and 958-205 (2 person canvas sides).

Utility Box

Custom, checker plate constructed of aluminum (.100”), stainless steel T-locks and gaskets. Lift-up lid and rear door include gas shocks and three-point lock Provides full access to rear cargo area.



ARGO ACCESSORIES

Catwalk Mud Flaps

6.25” (160 mm) steel platform along the length of the vehicle. Includes a 10” (255 mm) mud flap.

HD Rubber Tracks


Fits over all 4 tires. Features UHMW-PE guides and aluminum backing washers.

Snow Plow

80” (2,032 mm) wide, frame mounted snow plow, manual left and right positioning, requires 622-145 winch for raising and lowering operations.

Foldable Windshield

Scratch-resistant acrylic in an aluminum frame. Features a lower wiper mount location. Stand alone option or use with 958-171 and 958-191 convertible top.

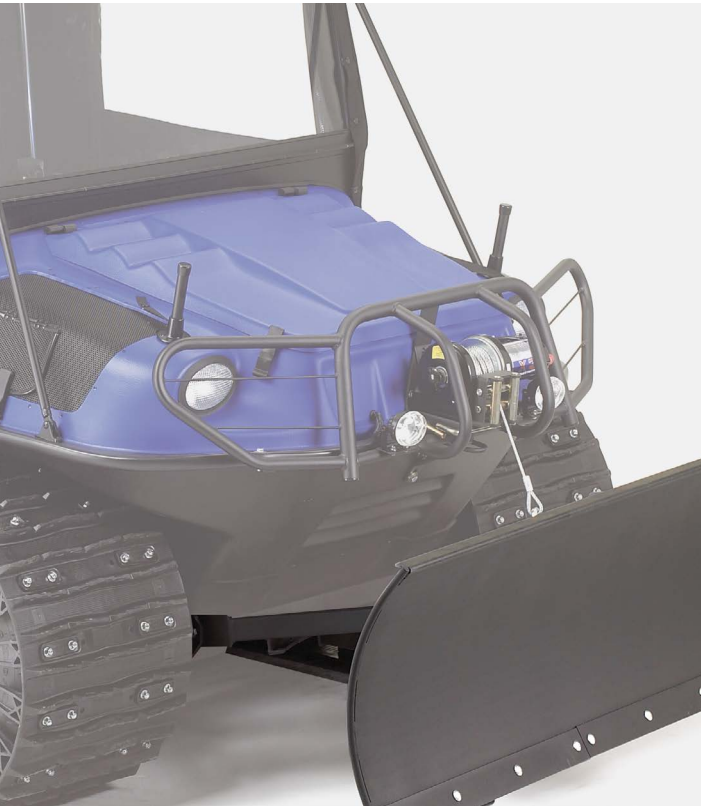

Gas Can Carrier

Mounted to the rear upper frame, this carrier is adjustable to accept multiple gas can sizes and shapes.

Rear Bench Seat

Frame mounted, forward facing rear bench seat provides additional seating for 2 passengers.

SPECIFICATIONS

MODEL	AVENGER PRO 800 XT RESPONDER 8X8	AVENGER 800 XT 8X8	CONQUEST PRO 800 XT 8X8
Horsepower	30HP	30HP	30HP
Cylinder	V-Twin	V-Twin	V-Twin
Fuel System	EFI	EFI	EFI
Cooling	Liquid Cooled	Liquid Cooled	Liquid Cooled
Alternator Output (Max)	40 amp	40 amp	60 amp
Service Brakes	Hydraulic	Hydraulic	Hydraulic
Steering Brakes	Hydraulic	Hydraulic	Hydraulic
Auto Chain Lubrication	-----	Standard	Standard
Transmission	Admiral	Admiral	Admiral
Transmission Option	ST	ST or HT	HT
HD Drive Belt	Standard	Standard	Standard
Full Skid Plate	Standard	Standard	Standard
Brushguard	Standard	Standard	Standard
Winch - Front	3,500 lb. Warn Winch	3,500 lb. Warn Winch	4,500 lb. Warn Winch
Winch - Rear Receiver Kit	Standard	Standard	Standard
Front Rack	-----	Standard	-----
Rollover Protection Structure	-----	-----	-----
Rear Mesh	-----	-----	-----
Roof	-----	-----	-----
Windshield with Wiper	-----	-----	-----
Power Dump Box	-----	-----	-----
Stretcher, Vice, Spot and Flashing Light	-----	-----	-----
Bilge Pump	Standard	Standard	Standard
Load Capacity - Land	840 lb. (381 kg)	860 lb. (390 kg)	1,500 lb. (680 kg)
Load Capacity - Water	690 lb. (313 kg)	710 lb. (322 kg)	865 lb. (392 kg)
Towing Capacity	1,800 lb. (816 kg)	1,800 lb. (816 kg)	2,000 lb. (907 kg)
Seating Capacity - Land	6	6	2
Seating Capacity - Water	4	4	2
Fuel Capacity	7.1 US gallons (27 litres)	7.1 US gallons (27 litres)	9.5 US gallons (36 litres)
Speed - Land	20 mph (32 km/h)	20 mph (32 km/h)	17 mph (27 km/h)
Speed - Water	3 mph (5 km/h)	3 mph (5 km/h)	3 mph (5 km/h)
Weight	1,560 lb. (708 kg)	1,540 lb. (699 kg)	1,735 lb. (787 kg)
Length	124 in (3,150 mm)	124 in (3,150 mm)	132 in (3,353 mm)
Width	60 in (1,524 mm)	60 in (1,524 mm)	65 in (1,651 mm)
Height	46 in (1,169 mm)	46 in (1,169 mm)	53 in (1,245 mm)
Axle Bearing Extensions	Standard	Standard	Standard
Tires	Argo AT 189 25x12-9	Argo AT 189 25x12-9	Argo XT 117 25x12-9
Rims	Steel Off-set	Steel Off-set	Steel Bead Lock
Ground Pressure (Tires)	1.7 psi (13.5 kPa)	1.7 psi (13.5 kPa)	1.7 psi (13.5 kPa)
Ground Pressure (Tracks)	0.67 psi (4.6 kPa)	0.67 psi (4.6 kPa)	0.67 psi (4.6 kPa)
Ground Clearance (Tires)	9.0 in (229 mm)	9.0 in (229 mm)	9.0 in (229 mm)
Ground Clearance (Tracks)	10.0 in (254 mm)	10.0 in (254 mm)	10.0 in (254 mm)
Warranty	1 Year	1 Year	1 Year
Colors	Red/Orange	Industrial Yellow/Green	Industrial Yellow/Green

* Specifications subject to change without notice

MODEL	CONQUEST PRO 800 XT-D 8X8	CONQUEST PRO 800 XT-X 8X8	CONQUEST PRO 800 XT-L 8X8
Horsepower	24HP	30HP	30HP
Cylinder	Triple	V-Twin	V-Twin
Fuel System		EFI	EFI
Cooling	Liquid Cooled	Liquid Cooled	Liquid Cooled
Alternator Output (Max)	65 amp	60 amp	60 amp
Service Brakes	Hydraulic	Hydraulic	Hydraulic
Steering Brakes	Hydraulic	Hydraulic	Hydraulic
Auto Chain Lubrication	Standard	Standard	Standard
Transmission	Admiral	Admiral	Admiral
Transmission Option	HT	HT	HT
HD Drive Belt	Standard	Standard	Standard
Full Skid Plate	Standard	Standard	Standard
Brushguard	Standard	Standard	Standard
Winch - Front	4,500 lb. Warn Winch	4,500 lb. Warn Winch	4,500 lb. Warn Winch
Winch - Rear Receiver Kit	Standard	Standard	Standard
Front Rack	-----	-----	-----
Rollover Protection Structure	-----	Standard	Standard
Rear Mesh	-----	-----	Standard
Roof	-----	Standard	Standard
Windshield with Wiper	-----	Standard	Standard
Power Dump Box	-----	Standard	-----
Stretcher, Vice, Spot and Flashing Light	-----	-----	Standard
Bilge Pump	Standard	Standard	Standard
Load Capacity - Land	1,350 lb. (612 kg)	1,170 lb. (531 kg)	1,190 lb. (540 kg)
Load Capacity - Water	715 lb. (324 kg)	Not Amphibious	Not Amphibious
Towing Capacity	2,000 lb. (907 kg)	2,000 lb. (907 kg)	2,000 lb. (907 kg)
Seating Capacity - Land	2	2	2
Seating Capacity - Water	2	-----	-----
Fuel Capacity	9.5 US gallons (36 litres)	9.5 US gallons (36 litres)	9.5 US gallons (36 litres)
Speed - Land	17 mph (27 km/h)	17 mph (27 km/h)	17 mph (27 km/h)
Speed - Water	3 mph (5 km/h)	-----	-----
Weight	1,885 lb. (855 kg)	2,065 lb. (937 kg)	2,045 lb. (928 kg)
Length	132 in (3,353 mm)	132 in (3,353 mm)	125 in (3,175 mm)
Width	65 in (1,651 mm)	65 in (1,651 mm)	65 in (1,651 mm)
Height	53 in (1,245 mm)	79 in (2,007 mm)	79 in (2,007 mm)
Axle Bearing Extensions	Standard	Standard	Standard
Tires	Argo XT 117 25x12-9	Argo XT 117 25x12-9	Argo XT 117 25x12-9
Rims	Steel Bead Lock	Steel Bead Lock	Steel Bead Lock
Ground Pressure (Tires)	1.7 psi (13.5 kPa)	1.7 psi (13.5 kPa)	1.7 psi (13.5 kPa)
Ground Pressure (Tracks)	0.67 psi (4.6 kPa)	0.67 psi (4.6 kPa)	0.67 psi (4.6 kPa)
Ground Clearance (Tires)	9.0 in (229 mm)	9.0 in (229 mm)	9.0 in (229 mm)
Ground Clearance (Tracks)	10.0 in (254 mm)	10.0 in (254 mm)	10.0 in (254 mm)
Warranty	1 Year	1 Year	1 Year
Colors	Industrial Yellow/Green	Industrial Yellow/Green	Industrial Yellow/Green



DEALER INFORMATION

PART#: 678-040 Printed in Canada 08/2018



GO
ANYWHERE

WWW.ARGOXTV.COM

Some vehicle applications shown are for demonstration purposes, originating from third parties and not available from ARGO. In all cases vehicle load limits have been considered. When operating in water, always wear approved Personal Floatation Devices. Always remain seated while in the ARGO. ATVs and XTVs can be hazardous to operate. Improper use can cause severe injury or death. Riders must wear an approved helmet, eye protection, protective clothing and when operating in water always wear a personal floatation device. Use handholds and stay completely inside the vehicle. Each rider must read and understand the operator's manual before riding. Follow all instructions and warnings. Avoid abrupt maneuvers, paved surfaces, hard acceleration when turning, and side hilling; slow down before entering a turn. Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Never carry a passenger on a single-rider ATV. ATVs are recommended only for users over 16 years old. Never operate on public roads. ATVs and XTVs are designated for off-highway vehicle access only—collisions with cars and trucks can occur. Never drive or ride under influence of alcohol or drugs. Do not shoot from or lean firearms or bows against the ATV or XTV. ARGO recommends that all riders take an ATV training course. When equipped with tracks, Conquest Pro-Series models are not fully amphibious, however water crossing is possible with a fording depth of 26" (660 mm). For safety or training information in the U.S., call the ATV Safety Institute at (800) 887-2887. In Canada, please contact the Canada Safety Council at (613) 739-1535 or see your dealer. Along with concerned conservationists everywhere, Argo urges you to respect public and private lands. Ride only on designated areas or trails. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others when riding. All materials and specifications are subject to change without notice. All specifications, claims and information contained within are based on current knowledge and readily available printed material as of July 31, 2018.

© 2018 ARGO